

United States X 41014
Willey

[15] 3,658,410

[45] Apr. 25, 1972

[54] **WIDE ANGLE ANAMORPHIC REFRACTIVE LENSES**

[72] Inventor: **Ronald R. Willey**, Indialantic, Fla.
[73] Assignee: **The United States of America as represented by the Secretary of the Navy**
[22] Filed: **Feb. 8, 1971**
[21] Appl. No.: **113,180**

[52] U.S. Cl. **350/181, 350/214**
[51] Int. Cl. **G02b 13/08**
[58] Field of Search **350/181, 214, 191**

[56] **References Cited**

UNITED STATES PATENTS

2,821,110 1/1958 Cook 350/181
3,517,984 6/1970 Lindstedt et al. 350/181


2,956,475 10/1960 Harris et al. 350/181
3,230,826 1/1966 Bednarz 350/214

Primary Examiner—John K. Corbin
Attorney—Richard S. Sciascia, John W. Pease and Harvey A. David

[57] **ABSTRACT**

A wide angle anamorphic refractive lens system having an anamorphic field of view in excess of $160^\circ \times 60^\circ$ is disclosed which can be scaled for T.V. camera and Eidophor projection. The system is characterized by a large diameter negative group of lens elements in which all elements have spherical surfaces except one element which has cylindrical surfaces, and a positive group including an element having at least one cylindrical surface which brings an image, compressed in one direction by the cylindrical element of the first group, into sharp focus.

1 Claims, 2 Drawing Figures

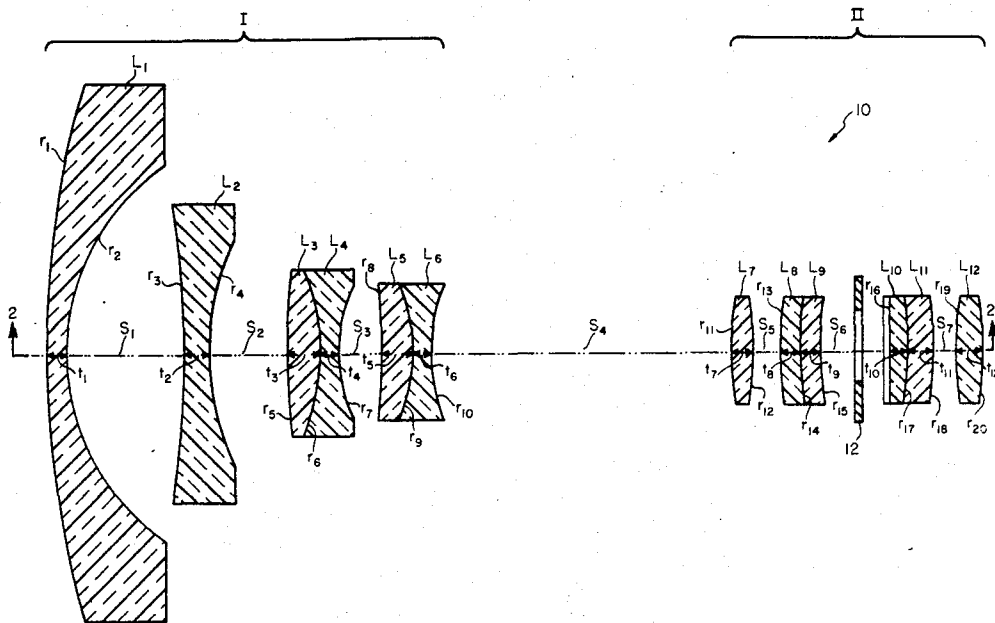

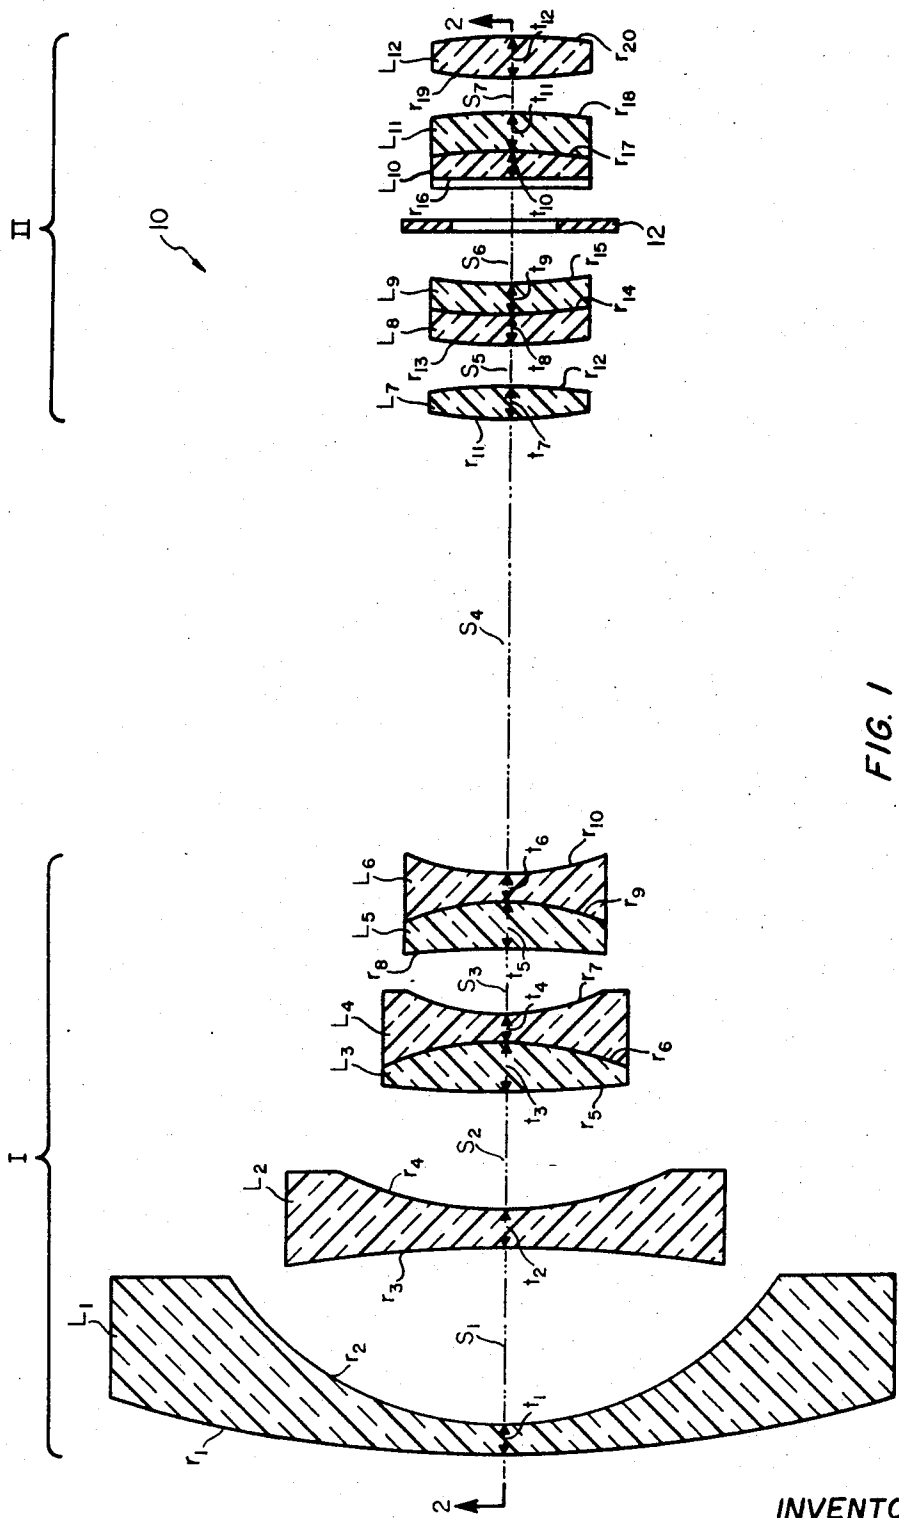


FIG. 1

INVENTOR
Ronald R. Willey
BY *Harvey A. David*
John W. Pease
ATTORNEYS

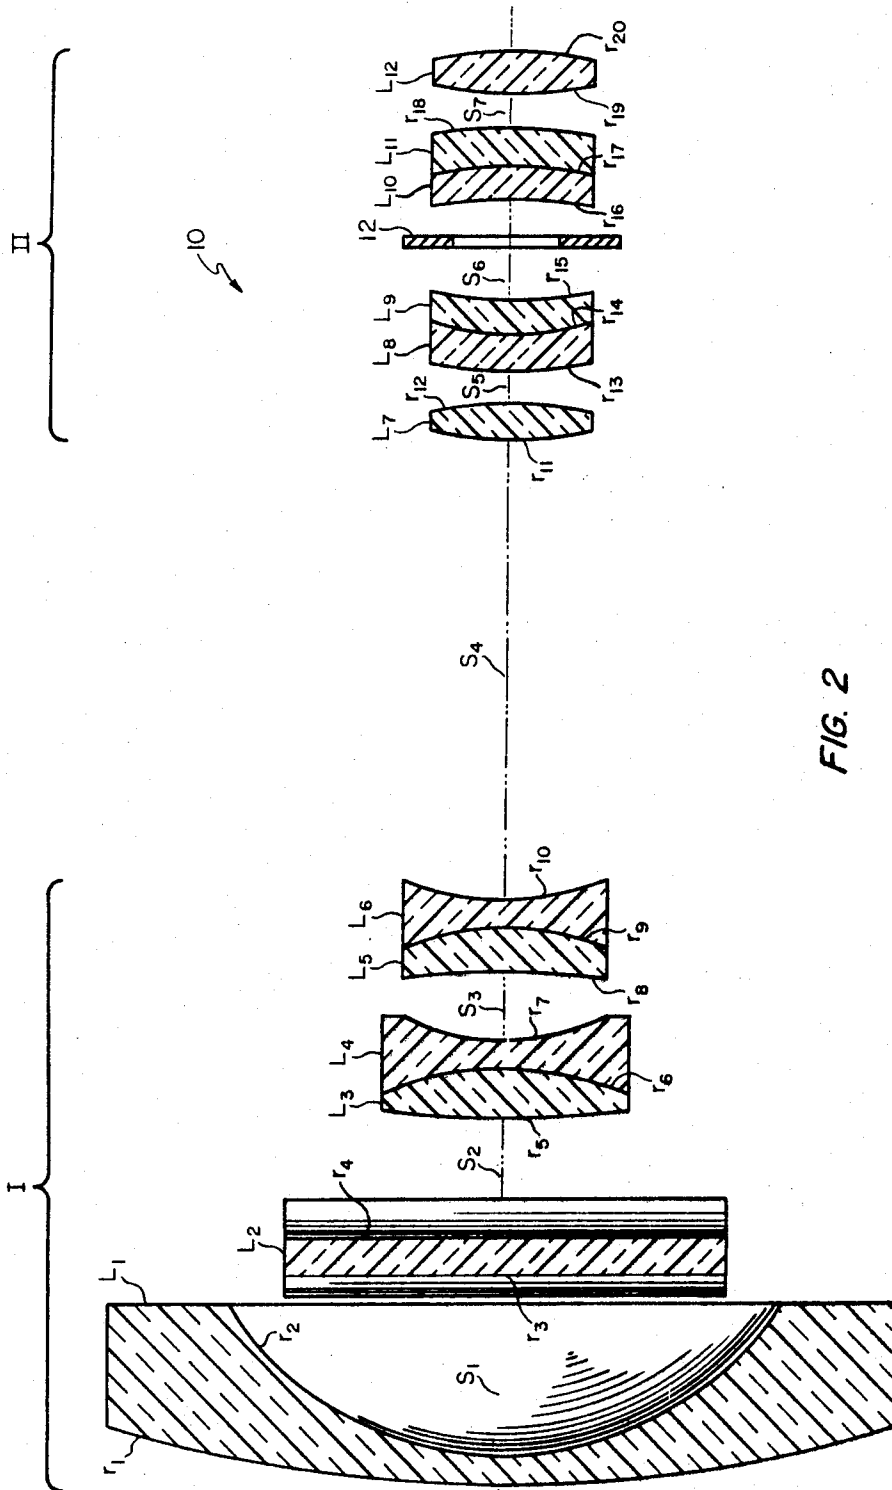


FIG. 2

INVENTOR
Ronald R. Willey
BY *Harvey A. David*
John W. Chase
ATTORNEYS

WIDE ANAMORPHIC REFRACTIVE LENSES

DESCRIPTION OF THE PREFERRED EMBODIMENT

BACKGROUND OF THE INVENTION

This invention relates to a wide angle anamorphic lens system and more particularly to such a system adapted, when used in a camera, to photograph (or otherwise produce images such as on television camera tubes) an extremely wide field of view in one direction and a normal field in a mutually perpendicular direction or, when used as a projector, to project an extremely wide anamorphic field onto a spherical screen.

Wide field of view lenses have existed for some time, such as that exemplified in U.S. Pat. No. 3,230,826, and anamorphic lens systems including reflective elements such as that described by Bowers and Blaisse in the Journal of the Society of Motion Picture and Television Engineers, Mar., 1956, have also existed for some time. However, the combination of an extremely wide field of view in an anamorphic lens form has not heretofore been accomplished in an all refracting lens, that is to say a lens with no mirror elements.

One important use of wide angle camera and projection lenses is found in visual display simulation where, through the agency of closed circuit television, a model or photographic scene is displayed to a trainee for example in the cockpit of a flight trainer.

Because the normal field of vision is of wider expanse horizontally than vertically and because of the typical 3:4 format of television, the presently available refractive wide angle lens systems, being non-anamorphic, are subject to light loss in the unused upper and lower vertical portions of the field of view of the lenses. Moreover, the fact that a number of resolution elements (e.g. scan lines) fall in portions of the field of view which are not useable with the existing wide angle lenses results in an undesirable loss of information content.

Inasmuch as simulators of the kind mentioned often comprise T.V. projectors of the Eidophore type, it is often the case that only a wide angle projection lens having a suitably long back focal length can be used, thereby considerably limiting the availability of useable lenses.

SUMMARY OF THE INVENTION

With the foregoing in mind, it is a principal object of this invention to provide a wide angle lens system having a horizontal field of view in excess of 160° and a vertical field of view of 60° or more in an image formed in the usual 3:4 format of television. This requires that a wide field of view be compressed in the horizontal direction with the use of lens elements with cylindrical components or toroidal surfaces.

A further object of the invention is to provide such a lens system with a long back focal length to allow its use with projection systems such as an Eidophor light valve where the focal plane is far removed from the nearest access point.

As another object the invention aims to provide a wide angle, anamorphic lens system which can be embodied both as a camera lens, for example in a T.V. vidicon apparatus, and as a projection lens, for example with an Eidophor apparatus, and wherein the camera lens embodiment is a direct scale reduction of the projection lens embodiment, whereby distortion errors are strongly cancelled in a T.V. system employing both lenses.

Yet another object is the provision of a novel anamorphic, wide angle lens of the foregoing character which comprises only refractive lens elements.

The invention may be further said to reside in certain novel combinations, arrangements and dispositions of elements whereby the foregoing objects and advantages, as well as others which will become apparent from the following description of a preferred embodiment, are achieved.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a longitudinal sectional view of an anamorphic, wide angle lens system embodying the invention; and

FIG. 2 is a longitudinal sectional view of the lens system of FIG. 1 when viewed substantially along line 2-2 of FIG. 1.

In the form of the invention illustrated in the drawings and described hereinafter, there is provided an anamorphic, wide angle Eidophor projection lens system 10 comprising a front, negative objective group I and a rear, positive group II separated from each other by a relatively large air space s_4 . The front group I, which is the group of larger lenses, is composed of six elements $L_1 - L_6$, five of which contain only spherical surfaces. The second largest element, L_2 , has surfaces which are only cylindrical in curvature and this is the major element which produces the anamorphic compression.

Thus, L_1 is a large concave-convex lens having spherical surfaces r_1, r_2 and thickness t_1 . Lens L_2 has concave cylindrical surfaces r_3, r_4 , a thickness t_2 , and the surface r_3 is separated from surface r_2 by an air space s_1 . Lens L_3 has a surface r_5 , a surface r_6 in common with lens L_4 , a thickness t_3 , and the surface r_5 is separated from surface r_4 by an air space s_2 . Lens L_4 , which shares surface r_6 with L_3 has a surface r_7 and a thickness t_4 . Lens L_5 has a surface r_8 , a surface r_9 in common with lens L_6 , a thickness t_5 , and the surface r_8 is separated from surface r_7 by an air space s_3 . Lens L_6 , which shares surface r_9 with lens L_5 , has a surface r_{10} , and a thickness t_6 .

The rear group II is composed of six lenses $L_7 - L_{12}$, five of which contain only spherical surfaces, and one of which, L_{10} , contains a cylindrical surface. Thus, lens L_7 has surfaces r_{11}, r_{12} , thickness t_7 , and the surface r_{11} is separated from surface r_{10} by an air space s_4 . Lens L_8 has a spherical surface r_{13} , a spherical surface r_{14} in common with lens L_9 , a thickness t_8 , and the surface r_{13} is separated from surface r_{12} by an air space s_5 . Lens L_9 , which shares surface r_{14} with lens L_8 , has a surface r_{15} and a thickness t_9 . Lens L_{10} has a cylindrical surface r_{16} , a spherical surface r_{17} in common with lens L_{11} , a thickness t_{10} , and the surface r_{16} is separated from surface r_{15} by an air space s_6 . Lens L_{11} , which shares surface r_{17} with lens L_{10} , has a surface r_{18} and a thickness t_{11} . The last lens L_{12} of group II has surfaces r_{19} and r_{20} , a thickness t_{12} , and the surface r_{19} is separated from surface r_{18} by an air space s_7 .

The common surfaces r_6, r_9, r_{14} , and r_{17} between lens elements are conveniently formed by cementing the lens elements concerned in accordance with the practice which is well known to those skilled in the art to which the invention pertains.

The space s_6 conveniently accommodates an iris aperture 12. The iris aperture 12 is preferably variable so the lens system 10 is characterized by a relative aperture in the range $f/5.6$ to $f/32$.

Representative numerical values for the radii of surfaces r_1 to r_{20} , the thickness t_1 to t_{12} , and the separations s_1 to s_7 are given in inches in the following table, together with the refractive indices n_d and Abbe numbers v all as embodied in a projection lens for which the horizontal and vertical effective focal lengths were measured to be 24.5 mm and 46.2 mm, respectively, with a back focal length of 377.0 mm:

Lens	Radii	Thickness and air spacings	n_d	v
L_1	$r_1 = +32.10575$	$t_1 = 0.304$	1.518720	64.17
	$r_2 = +6.23709$	$s_1 = 3.597$		
L_2	$r_3 = -22.11410; \infty^*$	$t_2 = 0.500$	1.518720	64.17
	$r_4 = +5.40160; \infty^*$	$s_2 = 2.409$		
I..... L_3	$r_5 = +35.48563$	$t_3 = 0.979$	1.734300	28.41
	$r_6 = -6.00811$	$t_4 = 0.279$		
L_4	$r_7 = +2.85286$	$s_3 = 1.652$	1.518720	64.17
	$r_8 = -16.44736$	$s_4 = 0.700$		
L_5	$r_9 = -4.75172$	$t_5 = 0.297$	1.518720	64.17
L_6	$r_{10} = -6.03245$	$s_5 = 15.205$		

Continued

II...	L ₇	r ₁₁ = +23.21801	t ₇ = 0.635	1.518720	64.17
		r ₁₂ = -22.26179	s ₅ = 0.484		
	L ₈	r ₁₃ = +16.82935	t ₈ = 0.384	1.734300	28.41
		r ₁₄ = +7.86101	t ₉ = 0.400		
	L ₉	r ₁₅ = +108.57763	s ₆ = 0.920	1.518720	64.17
		r ₁₆ = ∞; -317.46031*	t ₁₀ = 0.400		
	L ₁₀	r ₁₇ = -9.26440	t ₁₁ = 0.454	1.734300	28.41
		r ₁₈ = -19.92428	s ₇ = 0.587		
	L ₁₁	r ₁₉ = +26.63825	t ₁₂ = 0.665	1.518720	64.17
		r ₂₀ = -20.48340			

*Anamorphic (cylindrical) surfaces.

Of course, some tolerances in dimensions are acceptable, but it is desirable for best results that variances from the dimensions given in the previous table be within the limits given in inches in the following table:

Dimension	Tolerance (±)	Dimension	Tolerance (±)
r ₁	.160	t ₁	.010
r ₂	.031	t ₂	.010
r ₃	.111	t ₃	.010
r ₄	.027	t ₄	.010
r ₅	.178	t ₅	.010
r ₆	.020	t ₆	.010
r ₇	.014	t ₇	.010
r ₈	.082	t ₈	.010
r ₉	.024	t ₉	.010
r ₁₀	.030	t ₁₀	.010
r ₁₁	.120	t ₁₁	.010
r ₁₂	.120	t ₁₂	.010
r ₁₃	.084	s ₁	.005
r ₁₄	.034	s ₂	.005
r ₁₅	.543	s ₃	.005
r ₁₆	1.60	s ₄	.020
r ₁₇	.046	s ₅	.005
r ₁₈	.100	s ₆	.005
r ₁₉	.133	s ₇	.005
r ₂₀	.102		

From the foregoing tables, it will be seen that lens L₂ and L₁₀ are anamorphic in character. As is evident from FIGS. 1 and 2, lenses L₂ and L₁₀ are disposed with their respective cylindrical axes parallel to one another. The shift of focal plane caused by the cylindrical element L₂ in the negative group I is just compensated by the cylindrical element L₁₀ in the positive group II so that a sharp image is formed at the focus of the lens system 10. The resulting extreme field of view of a projection lens built according to the foregoing table has been measured as 180° by 70°. A camera lens has also been built according to the principles of this invention but scaled down in size by a factor of 5.66.

The lenses embodying the invention provide a distinct advantage over previous very wide angle camera and projection lenses because of the anamorphic feature which allows the information content, or number of resolution elements (e.g. television scan lines) available on the receiving or projection surface, to be more fully utilized because the upper and lower wide angle fields of view are ignored by the lenses. This appears as a further advantage in projection systems in that the available light is concentrated only in 70° of vertical direction rather than 180° of vertical direction, thereby resulting in improved brightness throughout the picture area.

Obviously many modifications and variations of the present invention are possible in the light of the above teachings. It is therefore to be understood that within the scope of the appended claims the invention may be practiced otherwise than as specifically described.

What is claimed is:

1. A wide angle anamorphic lens system comprising: a negative first group of lens elements and a positive second group of lens elements spaced along a common optical axis;

said first group including a plurality of lens elements all but one of which are characterized by spherical surfaces, and

said one of which is characterized by first and second cylindrical surfaces;

said second group including a plurality of lens elements all but one of which are characterized only by spherical surfaces, and said one element of said second group being characterized by at least a third cylindrical surface;

said first, second, and third cylindrical surfaces having parallel axes of curvature whereby the shift of focal plane associated with anamorphic compression caused by said first and second cylindrical surfaces in said first group is just compensated by said third cylindrical surface in said second group so that a sharp image is formed at the focus of the lens system; and

said first group comprising first (L₁), second (L₂), third (L₃), fourth (L₄), fifth (L₅), and sixth (L₆) lens elements;

said first element being a relatively large diameter negative meniscus lens, said second element comprising said first and second cylindrical surfaces and separated from said first element by a first air space (s₁), said third and fourth elements being cemented to form a first doublet separated from said second element by an air space (s₂), and said fifth and sixth elements being cemented to form a second doublet separated from said first doublet by an air space (s₃);

said second group comprising seventh (L₇), eighth (L₈), ninth (L₉), tenth (L₁₀), eleventh (L₁₁), and twelfth (L₁₂) lens elements;

said seventh element being separated from said second doublet by an air space (s₄), said eighth and ninth elements being cemented to form a third doublet separated from said seventh element by an air space (s₅), said tenth and eleventh elements being cemented to form a fourth doublet separated from said third doublet by an air space (s₆), and said twelfth element being separated from said fourth doublet by an air space (s₇);

said tenth element comprising said third cylindrical surface facing said air space (s₆); and

the radii of surface curvatures, thicknesses of said lens elements, and air spaces being substantially in proportion to the dimensions given in the following table:

Lens	Radii	Thickness and air spacings	n _d	τ
L ₁	r ₁ = +32.19575	t ₁ = 0.304	1.518720	64.17
	r ₂ = +6.23709	s ₁ = 3.597		
L ₂	r ₃ = -22.11410; ∞*	t ₂ = 0.500	1.518720	64.17
	r ₄ = +5.40160; ∞*	s ₂ = 2.400		
L ₃	r ₅ = +35.48563	t ₃ = 0.979	1.734300	28.41
	r ₆ = -6.00811	t ₄ = 0.279		
L ₄	r ₇ = +2.85266	s ₃ = 1.652	1.518720	64.17
	r ₈ = -16.44736	t ₅ = 0.700		
L ₅	r ₉ = -4.75172	t ₆ = 0.297	1.518720	64.17
	r ₁₀ = +6.03245	s ₄ = 15.205		
L ₇	r ₁₁ = +23.21801	t ₇ = 0.695	1.518720	64.17
	r ₁₂ = -22.26179	s ₅ = 0.484		
L ₈	r ₁₃ = +16.82935	t ₈ = 0.384	1.734300	28.41
	r ₁₄ = +7.86101	t ₉ = 0.400		
L ₉	r ₁₅ = +108.57763	s ₆ = 0.920	1.518720	64.17
	r ₁₆ = ∞; -317.46031*	t ₁₀ = 0.400		
L ₁₀	r ₁₇ = -9.26440	t ₁₁ = 0.454	1.734300	28.41
	r ₁₈ = -19.92428	s ₇ = 0.587		
L ₁₁	r ₁₉ = +26.63825	t ₁₂ = 0.665	1.518720	64.17
	r ₂₀ = -20.48340			

*Anamorphic (cylindrical) surfaces.

* * * * *